


## Supplemental Instructions for Gold Genie Prospector # -6667


Gold Genie revised the frame for the Prospector in 2010 and the revised instruction set is not finished. Therefore we have prepared this supplement to help you assemble the unit.



Insert the legs into the aluminum leg caps so that they are properly oriented and the buttons snap into place. To remove legs depress the snap buttons with a pen and pull the legs out of the leg caps.



The assembled legs and cross member should look like this with the wire hanger for the gold pan attached to the crossmember.

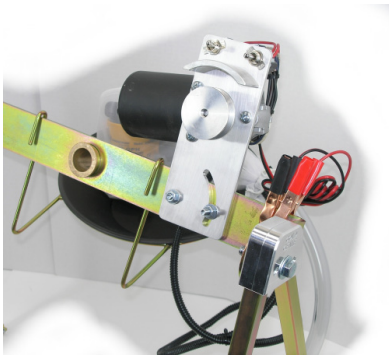

Attach the motor / switch plate to the cross member using the bolts and washers provided. After the plate is mounted place the fan belt over the pulley so that the belt will be in place when you insert the wheel.

Insert the wheel into the brass bushing making sure the fan belt is in place. Adjust the tension on the fan belt and tighten the motor plate bolts. Screw the spray bar onto the water valve and attach the 5/8 clear hose from the pump to the water valve.

Your Gold Genie Prospector Model is now fully assembled and ready to go to work separating gold and other values from the waste material.

One of the advantages of the new frame design is that you can put a bucket in front of the wheel and recirculate the water.



13911 Pioneer Rd  
Apple Valley, CA 92307  
866-838-5623